

新政

Model H-620


管道式流量計

Model	Measuring range m³/h	Glue	Male	Female	Elbow
15	10~100 L/h 16~160 L/h 25~250 L/h 40~400L/h 60~600 L/h 100~1000 L/h	Ø20	1/2"NPT 3/4"NPT	BSP 1/2"	BSP 1/2" NPT 1/2"
25	0.1~1 0.16~1.6 0.25~2.5	Ø32	3/4"NPT	BSP 3/4" NPT3/4"	BSP 3/4" NPT 3/4"
32	0.4~4 0.6~6	Ø40	1"NPT	BSP 1" NPT1"	BSP1" NPT1"
50	0.4~4 0.6~6 1~10 1.6~16	Ø63	2"NPT	BSP 2" NPT 2"	BSP 2" NPT 2"
65	5~25 8~40 12~60	Ø75	/	NPT 2½"	/
100	12~60 18~90 20~120	Ø110	Hole distance 180mm 8-Ø18		
125	12~60 18~90 20~120	Ø110	Hole distance 210mm 8-Ø18		
150	25~150 30~180	Ø110	Hole distance 240mm 8-Ø22		



- Max working pressure: 0.6Mpa
- Accuracy: +/-5%
- Float material: ABS

- Max temperature :60°C
- O-ring material: VITON

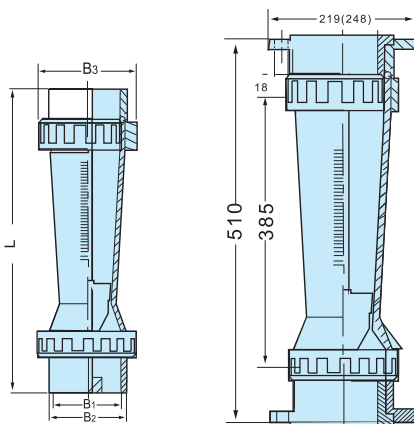

DN: 15~65

DN: 100~150

Sizes

DN(mm)	(mm)			
	L	B1	B2	B3
15	220	20	26	51
25	230	32	39	60
32	290	40	49	72
50	350	63	73	98
65	420	75	88	122
100	547	Hole distance 180mm		8-Ø18
125	547	Hole distance 210mm		8-Ø18
150	547	Hole distance 240mm		8-Ø22

新政儀器有限公司

TEL:(02)26940177 (02)26949824 FAX:(02)26946663

www.hsinjeng.com.tw E-mail : hsin.jeng@msa.hinet.net