

# 新政 Model EF-SS/SF 小流量電磁流量計

## EF-SS



### Performance Feature

Diameter: DN2~DN25

Electrodes: 316L

Medium: conductivity liquids

Medium:  $\geq 5\mu\text{S}/\text{cm}$ , softener water  $\geq 20\mu\text{S}/\text{cm}$

Accuracy:  $\pm 2.0\%$ RS

Velocity of flow: 0.3m/s -10m/s

Working temp.:  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Working pressure: 0.6MPa~1.0MPa

Protection: IP67


Output Signal: Pulse/Frequency

Power: 24VDC

Installation: compact, remote

Body material: Aluminium



## EF-SF

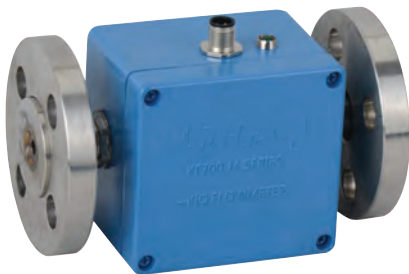

### Specifications:

Unit: L/min

DN	Measuring range		Male thread
	Standard type	Special type	
2	0.1~1	0.1~2	BSP3/8"
3	0.2~2	0.2~4	BSP3/8"
4	0.4~4	0.4~8	BSP3/8"
6	0.8~8	0.8~16	BSP3/8"
8	1.5~15	1.5~30	BSP1/2"
10	2~20	2~40	BSP1/2"
15	5~50	5~100	BSP1/2"
20	9~90	9~180	BSP3/4"
25	15~150	15~300	BSP1"

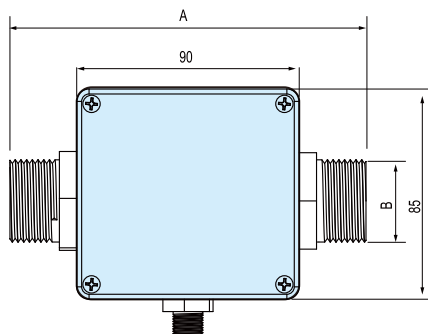

### External dimensions

Unit: mm

D N	A	B	C
2	130	BSP3/8"	67.5
3	130	BSP3/8"	
4	130	BSP3/8"	
6	140	BSP3/8"	
8	140	BSP1/2"	
10	140	BSP1/2"	
15	150	BSP1/2"	
20	150	BSP3/4"	
25	160	BSP1"	

新政儀器有限公司

TEL:(02)26940177 (02)26949824 FAX:(02)26946663  
www.hsinjeng.com.tw E-mail : hsin.jeng@msa.hinet.net