
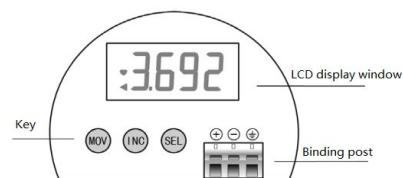


新政

Model QTLM SERIES

超音波液位計

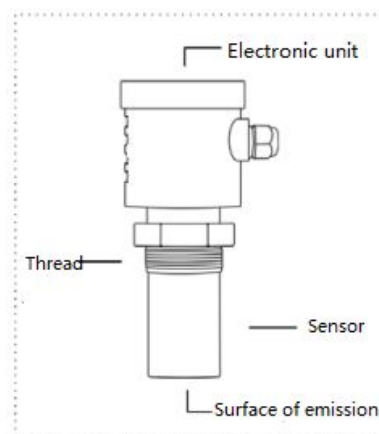

❖ Product Introduction

Model Parameters	QTLM4	QTLM6	QTLM8	QTLM12	QTLM20	QTLM30
Application	Industrial Level Measurement					
Measuring Range	liquid:0.2-4 m	liquid:0.25-6 m	liquid:0.3-8 m	liquid:0.5-12 m	liquid:0.8-20 m	liquid:1.2-30 m
Blank distance	0.20m	0.25m	0.30m	0.50m	0.80m	1.2m
Process Connection	G2 Thread			M95X2.0Thread		
Energy Transducer Material	ABS,PVC,PTFE					
Temperature	-40~ 75 Deg C (LCD: -20°C~ +70°C)					
Temperature compensation	The whole range with automatic compensation					
Process Pressure	±0.1MPa					
Precision	0.2% of actual range					
Signal output	4-20mA(Option: RS485/HART/Alarm)					
Power Supply	DC20V~32 ≥30mA					
Display Resolution Ratio	1mm					
Mode of Indication	4 Digit LCD					

新政儀器有限公司

TEL:(02)26940177 (02)26949824 FAX:(02)26946663

www.hsinjeng.com.tw E-mail : hsin.jeng@msa.hinet.net