

# 新政


Model H-600P

## 面積式流量計

### HSIN JENG VARIABLE AREA TYPE FLOW METER

#### Model H-600P

牙口 由令插管 壓克力保護管 REED SWITCH

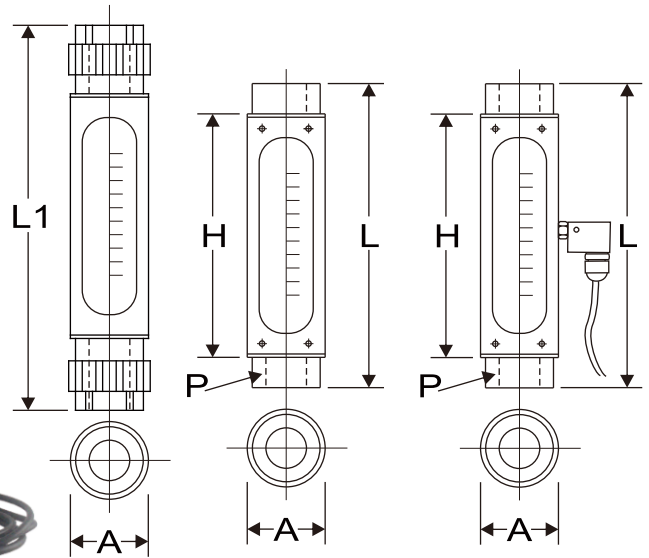

#### DIMENSIONS

MODEL	10	15	18	20	25	32	40	50
L	200	230	230	280	284	300	310	310
L1								
H	165	190	190	240	240	240	240	240
AØ	34	42	42	48	60	76	90	100
P	1/4	1/2	1/2	3/4	1	1 1/4	1 1/2	2

#### SPECIFICATIONS

Model	PS	PW	PX	PV	PP	PC	PD	GLASS	PC
Max.Temp	100°C			60°C	70°C	90°C	120°C	100°C	
Max. Press	10kg/cm²G			6kg/cm²G				4-6 kg	6-12 kg
Accuracy	WATER ± 3% F.S				AIR ± 4% F.S				


#### ORDERING INFORMATION

Body Material	Connection Type	Tube Material	Float Material	Seal Material
S SS304	A FPT	G GLASS	S SS304	N NEOPRENE
W SS316	B FNPT	P PC	W SS316	V VITON
V P.V.C	C 美規由令		V P.V.C	T TEFLON
P P.P	D 南亞由令		P P.P	
D P.V.D.F	E 美規插管		D P.V.D.F	
X SS316L	F 南亞插管		X SS316L	
C C.P.V.C	G 衛生夾接		C C.P.V.C	

Protector Material	Connection Size	Alarm Switch
S SS304	6 1/4" 25 1"	N NONE
A ACRYLIC	10 3/8" 32 1 1/4"	H HI
P ALUMINUM	15 1/2" 40 1 1/2"	L LO
	20 3/4" 50 2"	A HI LO

Tube Size	Normal Flow Range			
	WATER	L/MIN	AIR	NL/MIN
10	0.03-0.3	0.08-0.8	0.5-5.0	1-15
	0.05-0.5	0.1-1.0	1-10	2-20
15	0.1-1.0	0.3-3.0	3-30	6-60
	0.2-2.0	0.4-4.0	5-50	8-80
18	0.5-5.0	1-10	10-100	20-200
	0.6-6.0	1-15	15-150	25-250
20	1-10	2-20	20-200	30-300
	1-15	3-30	25-250	50-500
25	3-30	5-50	50-500	100-1000
	4-40	8-80	80-800	150-1500
32	5-50	10-100	150-1500	250-2500
	8-80	12-120	200-2000	300-3000
40	10-100	20-200	250-2500	350-3500
	15-150	25-250	300-3000	400-4000
50	30-300	50-500	350-3500	450-4500
	40-400	60-600	400-4000	500-5000

NOTE: 各尺寸流量，均可以依客戶需求訂製

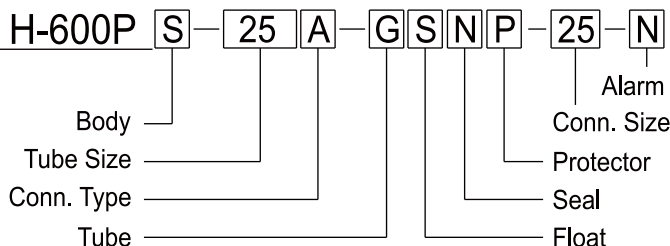

新政儀器有限公司

TEL:(02)26940177 (02)26949824 FAX:(02)26946663  
www.hsinjeng.com.tw E-mail : hsin.jeng@msa.hinet.net