


新政

Model H-700DPF H-700DPP


差壓面積式流量計

DIFFERENTIAL TYPE AND AN AREA TYPE FLOW METER

Model H-700DPP

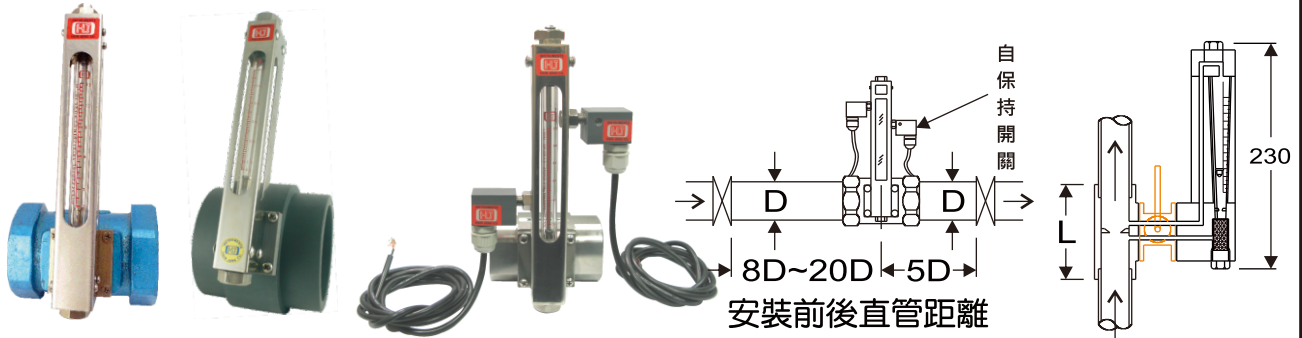

Model H-700DPF

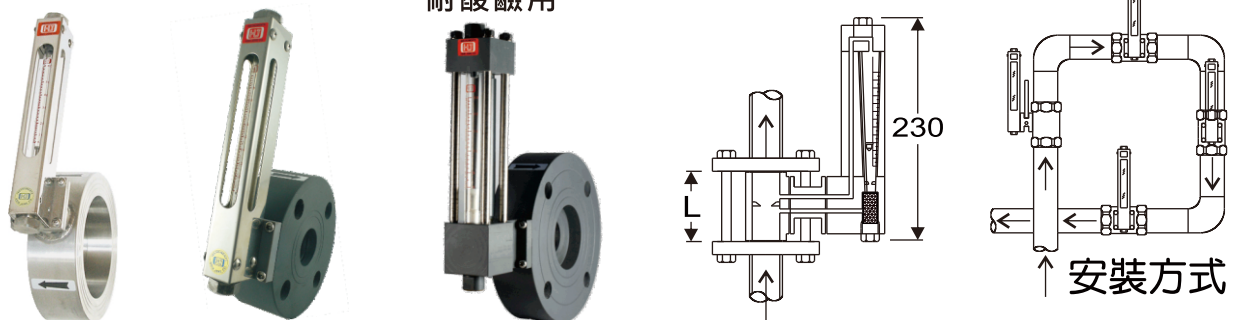

ORDERING INFORMATION

Body Material	Connection Type	Tube Material	Float Material	Seal Material
S SS304	J JIS 10K	G GLASS	S SS304	N NEOPRENE
W SS316	A ANSI 150LB	P PC	W SS316	V VITON
V P.V.C	P PT		V P.V.C	
P P.P	N NPT		P P.P	
D P.V.D.F	O OTHER		D P.V.D.F	
I CS			C C.P.V.C	
C C.P.V.C				

Fluid Type	Connection Size			Alarm Switch
L LIQUID	10 3/8"	40 1 1/2"	125 5"	N NONE
A AIR	15 1/2"	50 2"	150 6"	H HI
	20 3/4"	65 2 1/2"	200 8"	L LO
	25 1"	80 3"	250 10"	A HI LO
	32 1 1/4"	100 4"	300 12"	

Tube Size	Normal Standard Range		L (mm)	
	WATER M3/HR	AIR NM3/HR	DPP	DPF
15	0.2-1	2-10	80	50
20	0.5-3	4-25	80	50
25	0.7-5	6-40	100	50
32	1-8	10-60	100	50
40	2-10	15-100	120	50
50	4-20	30-200	120	50
65	6-40	50-300	120	50
80	7-50	70-400	120	50
100	15-100	150-800	160	50
125	30-150	250-1200		50
150	40-200	300-1800		50
200	50-300	600-3000		50
250	80-500	800-3000		50
300	150-800	800-5000		50

H-700DPF S-50 J-G S N L-50 N

Body
Tube Size
Conn. Type
Tube
Alarm
Conn. Size
Fluid Type
Seal
Float

NOTE: (1)各尺寸流量，均可以依客戶需求訂製

(2) MODEL H-700DPP只製作到 4"

SPECIFICATIONS

Max. Temperature	60-100°C
Max. Pressure	6-10 kg/cm ² G
Accuracy	± 3% F.S

新政儀器有限公司

TEL:(02)26940177 (02)26949824 FAX:(02)26946663

www.hsinjeng.com.tw E-mail : hsin.jeng@msa.hinet.net