

# 新政


Model FT

# 浮球連續式液位計

## HSIN JENG LEVEL TRANSMITTER

### MODEL FT

法蘭

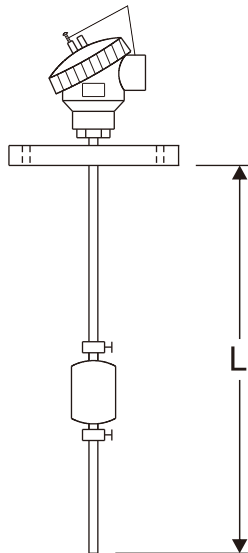


防爆接線盒



衛生夾接




牙口

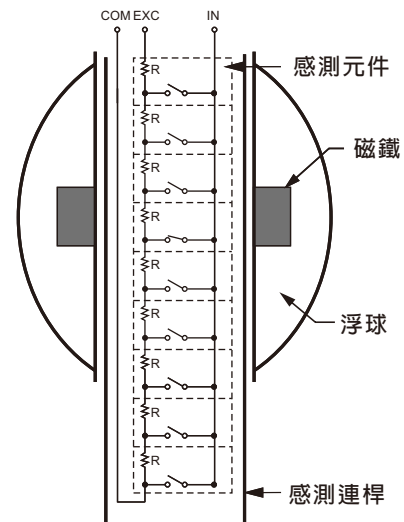

動作原理：浮球連續式液位計是利用浮球內磁鐵隨液位變化，來改變連桿內電阻與磁簧開關構成的電路，磁簧開關的間隙愈小，則精度愈高。電路信號可經由轉換器改為 4-20mA 信號，搭配指示器可以作遠距離的指示用。

### ORDERING INFORMATION

Body Material	Connection Size	Connection Type	Terminal Box	Electrical Connection	Float Material	
P PP	40 1 1/2"	A ANSI 150LB	P PP	A 1/2"PT	A PP(Ø43mmx50L)	F 316(Ø46mmx56L)
S SS304	50 2"	J JIS 10K	S SS304	B 3/4"PT	B PP(Ø56mmx63L)	G 316(Ø51mmx42L)
W SS316	65 2 1/2"	P PT	W SS316	C 1/2"NPT	C PVDF(Ø60mmx53L)	H PP(Ø65mmx77L)
V PVC	80 3"	N NPT	A ALUMINUM	D 3/4"NPT	D 316(Ø41mmx53L)	I 316(Ø75mmx 89L)
D P.V.D.F	100 4"	C 衛生夾接	D ALU. D2G4		E 316(Ø75mmx 73L)	
C C.P.V.C			E 316 D2G4			

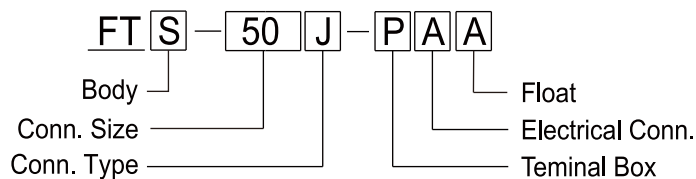

### SPECIFICATIONS

Material	SUS	PVDF	PP	PVC
Max.Temp	100℃		50℃	
Max. Press	10kg/cm²G	5kg/cm²G		
Resolution	12mm			

新政儀器有限公司

TEL:(02)26940177 (02)26949824 FAX:(02)26946663

www.hsinjeng.com.tw E-mail : hsin.jeng@msa.hinet.net